

Évaluation de la qualité et de la fiabilité de méthodes de *Representation Learning* appliquées aux données du SNDS pour le cancer du sein

M. Guyomard, AD. Bouhnik, L. Tassy, R. Urena

Atelier IACD, EGC 2025, Strasbourg

Inserm



Table of Contents

Introduction

Electronical Health Records

Representation Learning

Objectives

Methodology

Results

Conclusion and Perspectives

Electronical Health Records




Figure: An example of EHR.

Electronical Health Records




Figure: An example of EHR.

Challenges

- Temporal Dynamic: temporal dependencies;

Electronical Health Records




Figure: An example of EHR.

Challenges

- Temporal Dynamic: temporal dependencies;
- Multi-modality: a single visit contains multiple medical codes;

Electronical Health Records





Figure: An example of EHR.


🚫 Challenges

- Temporal Dynamic: temporal dependencies;
- Multi-modality: a single visit contains multiple medical codes;
- Unstructured data;
- Highly dimensional: thousands of unique medical codes.


Representation Learning



Representation Learning



Representation Learning



Definition (Representation Learning Task)

Patient Representation Learning task involves extracting meaningful information from the dense mathematical representation of a patient within an embedding space or latent space.

$$f_C : \mathbb{R}^L \rightarrow \mathbb{R}^m. \quad (1)$$

[Si, 2021], [Shickel, 2017]

Representation Learning

3 main Deep Learning strategies

- Natural Language Processing [Y. Choi, 2016], [E. Choi, 2016a-d]
- Autoencoders [Miotto, 2016], [Landi, 2020], [Baytas, 2017]
- Transformers [Li, 2020], [Rasmy, 2021]

Representation Learning

3 main Deep Learning strategies

- Natural Language Processing [Y. Choi, 2016], [E. Choi, 2016a-d]
- Autoencoders [Miotto, 2016], [Landi, 2020], [Baytas, 2017]
- Transformers [Li, 2020], [Rasmy, 2021]


3 types of representation

- Medical Codes [Y. Choi, 2016], [E. Choi, 2016a,b,d], [Li, 2020], [Rasmy, 2021]
- Visit [E. Choi, 2016b-d], [Rasmy, 2021]
- Patient [E. Choi, 2016a], [Miotto, 2016], [Landi, 2020], [Baytas, 2017]

Representation Learning

🌐 Evaluation Method

Quality and **Reliability** are assessed through the performance resulting from the prediction task fitted on the embedding space by the mean of **classification metrics mostly**.

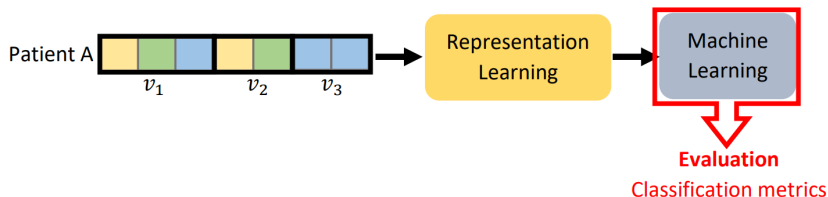


[Choi, 2016c], [Choi, 2016d], [Miotto, 2016]

Representation Learning

🌐 Evaluation Method

Quality and **Reliability** are assessed through the performance resulting from the prediction task fitted on the embedding space by the mean of **classification metrics mostly**.

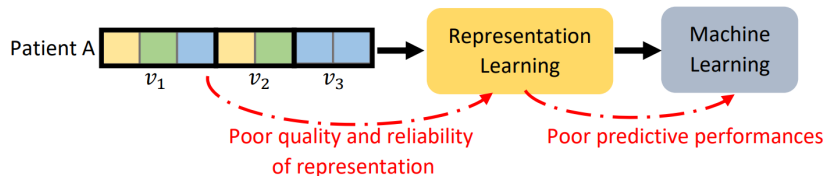

[Choi, 2016c], [Choi, 2016d], [Miotto, 2016]

Objectives

- Validation of state of the art Representation Learning tools
 - ▶ Quantify their accuracies
 - ▶ Analyse their reliability

Objectives

- Validation of state of the art Representation Learning tools
 - ▶ Quantify their accuracies
 - ▶ Analyse their reliability

1. Fit general latent spaces (unsupervised tools)

Strategy / Types	NLP	Autoencoder	Transformer
Medical code	Skip-Gram [Y.Choi, 2016], [E.choi, 2016a] [E.Choi, 2016d]	-	<i>Out of scope</i>
Visit	Med2Vec [E.Choi, 2016b], [E.choi, 2016c]	-	<i>Supervised Tools</i>
Patient	-	Deep Patient [Miotto, 2016]	

Objectives

- Validation of state of the art Representation Learning tools
 - ▶ Quantify their accuracies
 - ▶ Analyse their reliability

1. Fit general latent spaces (unsupervised tools)

Strategy / Types	NLP	Autoencoder	Transformer
Medical code	Skip-Gram [Y.Choi, 2016], [E.choi, 2016a] [E.Choi, 2016d]	-	<i>Out of scope</i>
Visit	Med2Vec [E.Choi, 2016b], [E.choi, 2016c]	-	<i>Supervised Tools</i>
Patient	-	Deep Patient [Miotto, 2016]	

2. Clustering task

Table of Contents

Introduction

Methodology

Skip-Gram

Med2Vec

Deep Patient

Evaluation of Patient Representations


Results

Conclusion and Perspectives



Skip-Gram

- Natural Language Processing
- Medical Code Representation [Y.Choi, 2016]

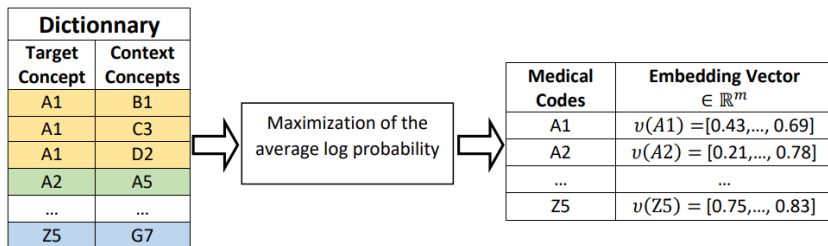


Schema of Skip-Gram.

**Theoretical information are provided in Appendix.*

Skip-Gram

- Natural Language Processing
- Medical Code Representation [Y.Choi, 2016]

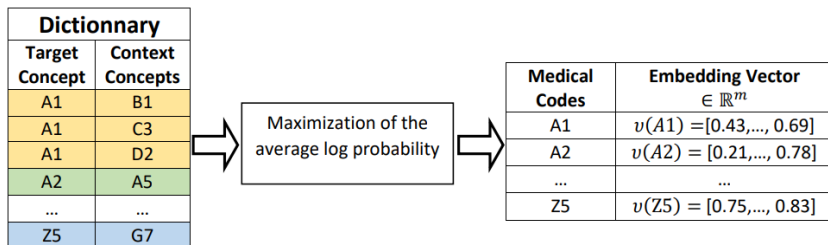


Schema of Skip-Gram.

- Patient Representation: sum all the medical codes' embedded vectors appearing for a patient [E.Choi, 2016a].

**Theoretical information are provided in Appendix.*

Med2Vec

- Multi-Layer Perceptron x Natural Language Processing
- Visit Representation [E.Choi, 2016b]

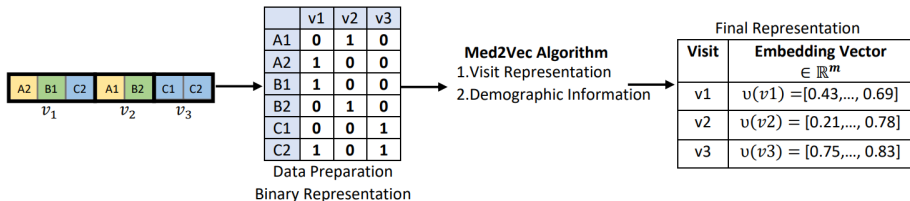


Schema of Med2Vec Algorithm.

**Theoretical information are provided in Appendix.*

Med2Vec

- Multi-Layer Perceptron x Natural Language Processing
- Visit Representation [E.Choi, 2016b]

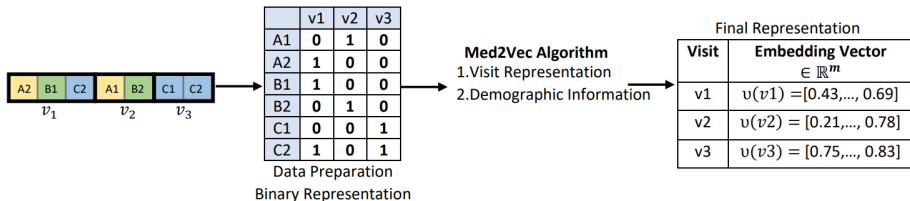


Schema of Med2Vec Algorithm.

- Patient Representation: sum all the visit representations.

**Theoretical information are provided in Appendix.*

Deep Patient

- Denoising Stacked Autoencoder
- Patient Representation [Miotto, 2016b]

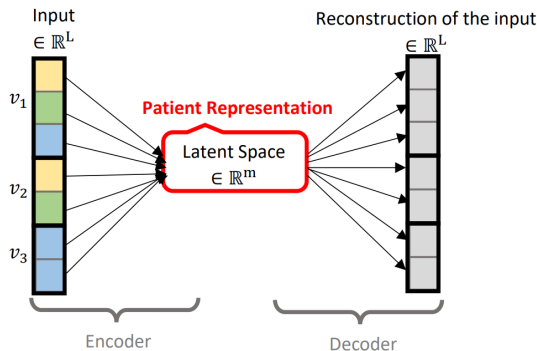

Schema of an Autoencoder.

**Theoretical information are provided in Appendix.*

Evaluation of Patient Representations

Clustering

- Clustering Methods
 1. K-means
 2. Gaussian Mixture Model
- Performance:
 1. Metric: silhouette score and Davies-Bouldin index
 2. Visualization: PCA and t-SNE
- Reliability: Chi-squared test on the clusters

Table of Contents

Introduction

Methodology

Results

- Settings

- Performance

- Clinical Reliability

Conclusion and Perspectives



Settings

Data

- VICAN study [[Bouhnik, 2015](#)]
- Female patients with Breast Cancer
- 1,304,361 events, 6111 patients (213 visits in average)
- 3407 unique medical codes

Settings

Data

- VICAN study [Bouhnik, 2015]
- Female patients with Breast Cancer
- 1,304,361 events, 6111 patients (213 visits in average)
- 3407 unique medical codes

Need of Representation Learning Tools !

Settings

Learning

1. Representation Learning
 - ▶ Gridsearch of the hyperparameters
 - ▶ Training of the hyperparameters

Settings

Learning

1. Representation Learning

- ▶ Gridsearch of the hyperparameters
- ▶ Training of the hyperparameters

2. Clustering Task

- ▶ Gridsearch of the optimal number of clusters
 - ▶ 10-folds CV
 - ▶ Maximization of the silhouette score on validation sample
- ▶ Training of the clusters
 - ▶ 10-folds CV

Performance


	Training Sample		Validation Sample	
	Silhouette Score ↑	Davies-Bouldin ind. ↓	Silhouette Score ↑	Davies-Bouldin ind. ↓
Skip-Gram	0.6 (0.005)	0.34 (0.005)	0.6 (0.006)	0.344 (0.02)
Med2Vec	0.55 (0.004)	0.3 (0)	0.54 (0.006)	0.31 (0.005)
Deep Patient	0.98 (0)	0.13 (0.005)	0.98 (0.002)	0.13 (0.007)

Average metrics (std) over the 10-folds for the k-means clustering task.

Performance

	Training Sample		Validation Sample	
	Silhouette Score ↑	Davies-Bouldin ind. ↓	Silhouette Score ↑	Davies-Bouldin ind. ↓
Skip-Gram	0.6 (0.005)	0.34 (0.005)	0.6 (0.006)	0.344 (0.02)
Med2Vec	0.55 (0.004)	0.3 (0)	0.54 (0.006)	0.31 (0.005)
Deep Patient	0.98 (0)	0.13 (0.005)	0.98 (0.002)	0.13 (0.007)

Average metrics (std) over the 10-folds for the k-means clustering task.

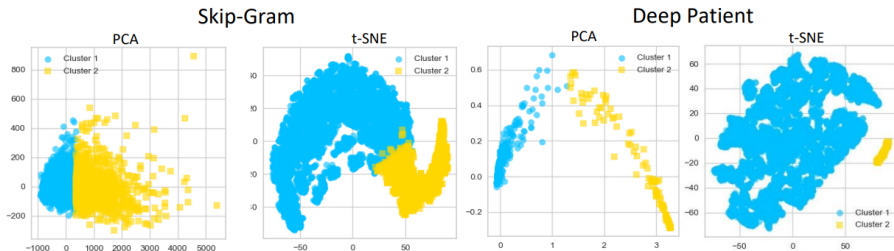

Clinical Reliability

	Skip-Gram	Med2Vec	Deep Patient
Partial Mastectomy	<0.05 (0)	0.07 (0.04)	<0.05 (0.02)
Mastectomy	<0.05 (0)	0.37 (0.13)	<0.05 (0.01)
Axillary Surgery	<0.05 (0)	<0.05 (0)	0.7 (0.23)
Chemotherapy Y/N	<0.05 (0)	<0.05 (0)	0.5 (0.27)
Chemotherapy Setting	<0.05 (0)	<0.05 (0)	<0.05 (0.03)
Chemotherapy Regimen	<0.05 (0)	<0.05 (0)	0.1 (0.22)
Targeted Therapy Y/N	0.87 (0.12)	<0.05 (0)	0.6 (0.31)
Targeted Therapy Setting	0.7 (0.01)	<0.05 (0)	0.7 (0.2)
Targeted therapy Regimen	0.34 (0.12)	<0.05 (0)	0.6 (0.31)
Radiotherapy Y/N	<0.05 (0.03)	<0.05 (0)	0.4 (0.23)
Radiotherapy Setting	<0.05 (0.21)	<0.05 (0)	<0.05 (0)
Endocrine Therapy Y/N	<0.05 (0.01)	<0.05 (0)	0.2 (0.2)
Endocrine Therapy Setting	<0.05 (0.03)	<0.05 (0)	<0.05 (0)
Endocrine Therapy Regimen	<0.05 (0)	<0.05 (0)	<0.05 (0)
BC Sub Type	<0.05 (0)	<0.05 (0)	0.2 (0.12)
Nodal status	<0.05 (0.01)	<0.05 (0)	0.06 (0.07)
Metastatic	<0.05 (0)	<0.05 (0)	<0.05 (0)

Average (std) of Chi-squared test p-values between the k-means clusters and the BC characteristics obtained on 5 random sub samples.

Table of Contents

Introduction

Methodology

Results

Conclusion and Perspectives



Conclusion

- Assessing the quality of RL tools only on empirical metrics is not sufficient;
- Unsupervised study: methods with higher value of silhouette score does not necessarily align with patients' clinical reality;
- Need of evaluation metrics assessing both the performance and the consistency of patient RL tools.

Conclusion

- Assessing the quality of RL tools only on empirical metrics is not sufficient;
- Unsupervised study: methods with **higher value of silhouette score does not necessarily align with patients' clinical reality**;
- Need of evaluation metrics assessing both the performance and the consistency of patient RL tools.

Future works

1. Develop an empirical metric to evaluate both performance and reliability of RL tools;
2. Develop an intrinsically interpretable RL tool.

References

- Y. Si, and al. **Deep representation learning of patient data from electronic health records (ehr): A systematic review.** *Journal of biomedical informatics*, vol. 115, p. 103671. (2021)
- B. Shickel and al. **Deep ehr: a survey of recent advances in deep learning techniques for electronic health record (ehr) analysis.** *IEEE journal of biomedical and health informatics*, vol. 22, no. 5, pp. 1589–1604. (2017)
- Y. Choi, and al. **Learning low-dimensional representations of medical concepts.** *AMIA Summits on Translational Science Proceedings*, p. 41, (2016)
- E. Choi, and al. **Medical concept representation learning from electronic health records and its application on heart failure prediction.** *arXiv preprint arXiv:1602.03686*, (2016a)
- E. Choi, and al. **Multi-layer representation learning for medical concepts,** *in proceedings of the 22nd ACM SIGKDD international conference on knowledge discovery and data mining*, pp. 1495–1504. (2016b)
- E. Choi, and al. **Doctor ai: Predicting clinical events via recurrent neural networks.** *Machine learning for healthcare conference.* PMLR, pp. 301–318. (2016c)
- E. Choi, and al. **Retain: An interpretable predictive model for healthcare using reverse time attention mechanism.** *Advances in neural information processing systems*, vol. 29. (2016d)
- R. Miotto, and al. **Deep patient: an unsupervised representation to predict the future of patients from the electronic health records.** *Scientific reports*, vol. 6, no. 1, pp. 1–10. (2016)
- AD Bouhnik, and al. **The labour market, psychosocial outcomes and health conditions in cancer survivors: protocol for a nationwide longitudinal survey 2 and 5 years after cancer diagnosis (the vican survey).** *BMJ open*, vol. 5, no. 3. (2015)

References (2)

- I. Landi et al. **Deep representation learning of electronic health records to unlock patient stratification at scale.** *NPJ digital medicine*, vol. 3, no. 1, p. 96. (2020)
- I. M. Baytas et al. **Patient subtyping via time-aware lstm networks.** *Proceedings of the 23rd ACM SIGKDD international conference on knowledge discovery and data mining*, pp. 65–74. (2017)
- Y. Li et al. **Behrt: transformer for electronic health records.** *Scientific reports*, vol. 10, no. 1, p. 7155. (2020)
- L. Rasmy et al. **Med-bert: pretrained contextualized embeddings on large-scale structured electronic health records for disease prediction.** *NPJ digital medicine*, vol. 4, no. 1, p. 86. (2021)

Table of Contents

Appendix

EHR

Skip-Gram Algorithm

Med2Vec Algorithm

Deep Patient Algorithm

Data

Experimental Settings

Performance results

Notation




Figure: An example of EHR.

Notation




Figure: An example of EHR.

● $V = \{v_1, \dots, v_n\};$

$$n = 3$$

Notation




Figure: An example of EHR.

- $V = \{v_1, \dots, v_n\}$;
- j-th visit: $v_j = \{d_1^j, d_2^j, \dots, d_{k_j}^j\}$;

$$n = 3$$

$$k_1 = 3, k_2 = k_3 = 2$$

Notation




Figure: An example of EHR.

- $V = \{v_1, \dots, v_n\}$;
- j-th visit: $v_j = \{d_1^j, d_2^j, \dots, d_{k_j}^j\}$;
- $v_j \subseteq \mathcal{C}$, $\mathcal{C} = \{c_1, \dots, c_{|\mathcal{C}|}\}$;

$n = 3$

$$k_1 = 3, \quad k_2 = k_3 = 2$$

Notation




Figure: An example of EHR.

- $V = \{v_1, \dots, v_n\};$
- j -th visit: $v_j = \{d_1^j, d_2^j, \dots, d_{k_j}^j\};$
- $v_j \subseteq \mathcal{C}, \quad \mathcal{C} = \{c_1, \dots, c_{|\mathcal{C}|}\};$
- $L = \sum_{t=1}^n |v_t|.$

$$n = 3$$

$$k_1 = 3, \quad k_2 = k_3 = 2$$

$$L = 7$$

Skip-Gram Algorithm

[\[Y.Choi, 2016\]](#)

- Medical representation: $\nu(c)$

$$\frac{1}{L} \sum_{l=1}^L \sum_{-w \leq j \leq w, j \neq 0} \log p(c_{t+j}|c_t), \quad (2)$$

with w representing the size of the context window and

$$p(c_{t+j}|c_t) = \frac{\exp(\nu(c_{t+j})^T \nu(c_t))}{\sum_{c=1}^{|\mathcal{C}|} \exp(\nu(c)^T \nu(c_t))}. \quad (3)$$

- Patient representation [\[E.Choi, 2016a\]](#)

$$e^{SG} = \sum_{t=1}^n \sum_{j=1}^{k_t} \nu(d_j^t) \in \mathbb{R}^m. \quad (4)$$

[E.Choi, 2016b]

- Visit representation

1. Intermediate visit representation given a visit $\bar{v}_t \in \{0, 1\}^{|C|}$

$$u_t = \phi(W_c \bar{v}_t + b_c) \in \mathbb{R}^{m'}, \quad (5)$$

with $\phi(x) = \max\{0, x\}$, $W_c \in \mathbb{R}^{m' \times |C|}$ and $b_c \in \mathbb{R}^{m'}$.

2. Concatenation with demographic information $d_t \in \mathbb{R}^d$

$$\nu_t = \phi(W_v [u_t, d_t] + b_v) \in \mathbb{R}^m, \quad (6)$$

with $W_v \in \mathbb{R}^{m \times (m' \times d)}$ and $b_v \in \mathbb{R}^m$.

- Patient representation

$$e^{Med} = \sum_{t=1}^n \nu_t \in \mathbb{R}^m. \quad (7)$$

[Miotto, 2016b]

- Patient representation
- Denoising Stacked Autoencoder
 1. Masking Noise algorithm on the input $\tilde{V} \in \mathbb{R}^L$.
 2. Encoder

$$y = f_{\theta}(\tilde{V}) = s(W\tilde{V} + b), \quad (8)$$

with $s(\cdot)$ a non-linear transformation, $W \in \mathbb{R}^{m \times L}$ and $b \in \mathbb{R}^m$.


3. Decoder

$$z = g_{\theta'}(y) = s(W'y + b'), \quad (9)$$

with $W' \in \mathbb{R}^{L \times m}$ and $b' \in \mathbb{R}^m$.

- VICAN study [[Bouhnik, 2015](#)], a national survey on French cancer survivors
- Inclusion Criteria of patients : (i) Female, (ii) diagnosed with Breast Cancer, (iii) who have reached the age of majority and (iv) have undergone surgery
- Exclusion criteria of patients : affected by another form of cancer
- **1,304,361 events, 6111 patients** with an average of 213 visits (min 4, max 1111)
- 3,407 medical codes at first
 - ▶ 2447 diagnosis (ICD-10 Classification)
 - ▶ 1977 procedures (Anatomical Therapeutic Chemical, ATC)
 - ▶ 1043 medications (Classification Commune des Actes Médicaux, CCAM)
- Grouping of the medical codes based on their hierarchical structure [[Y.Choi, 2016](#)], [[E.Choi, 2016a](#)]
 - ▶ 2 digits
 - ▶ It remains **3,407 unique medical codes**

Experimental Settings

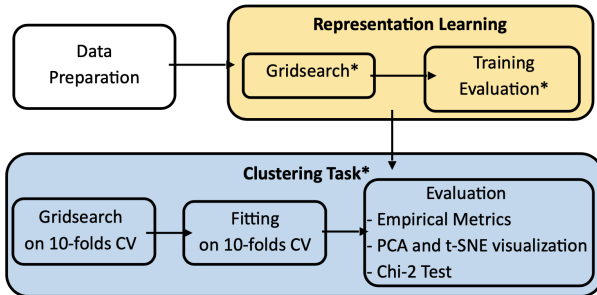

*Experimental settings. * The complementary tools provided on Github.*

Experimental Settings

	Epoch	Learning Rate	Tested Parameters
Skip-Gram	40	1e-3	Window Size: { 5 , 10} # False neighbors: { 5 , 10} Embedding Dim: {10, 20, 50 , 100}
Med2Vec	5	1e-6	Temporary Dim: {20, 50 , 100} Final Dim: { 20 , 50, 100} Window Size: { 1 , 3, 5}
Deep Patient	100	1e-3	Embedding Dim: {10, 20 , 50, 100} # Layers: {1, 3 , 5} Corruption Rate: { 0.01 , 0.05, 0.01}

Settings for the Gridsearch step, optimal parameters are in bold.

Performance results

	Training Sample		Validation Sample	
	Silhouette Score	Davies-Bouldin ind.	Silhouette Score	Davies-Bouldin ind.
K-means				
SG	0.6 (0.005)	0.34 (0.005)	0.6 (0.006)	0.344 (0.02)
M2V	0.55 (0.004)	0.3 (0)	0.54 (0.006)	0.31 (0.005)
DP	0.98 (0)	0.13 (0.005)	0.98 (0.002)	0.13 (0.007)
Gaussian Mixture Model				
SG	0.37 (0.01)	0.52 (0.008)	0.35 (0.01)	0.52 (0.01)
M2V	0.06 (0.06)	1.1 (0.4)	0.3 (0.09)	0.8 (0.2)
DP	0.9 (0)	0.62 (0.01)	0.9 (0.005)	0.6 (0.09)

Average (standard deviation) results obtained on clustering over the 10–folds CV, for Skip-Gram (SG), Med2Vec (M2V) and Deep Patient (DP) algorithms.